





# ASSEMBLY INSTRUCTION

## IP65 Power Receptacle RRAC3M-X-010

### (A) Chassis connector

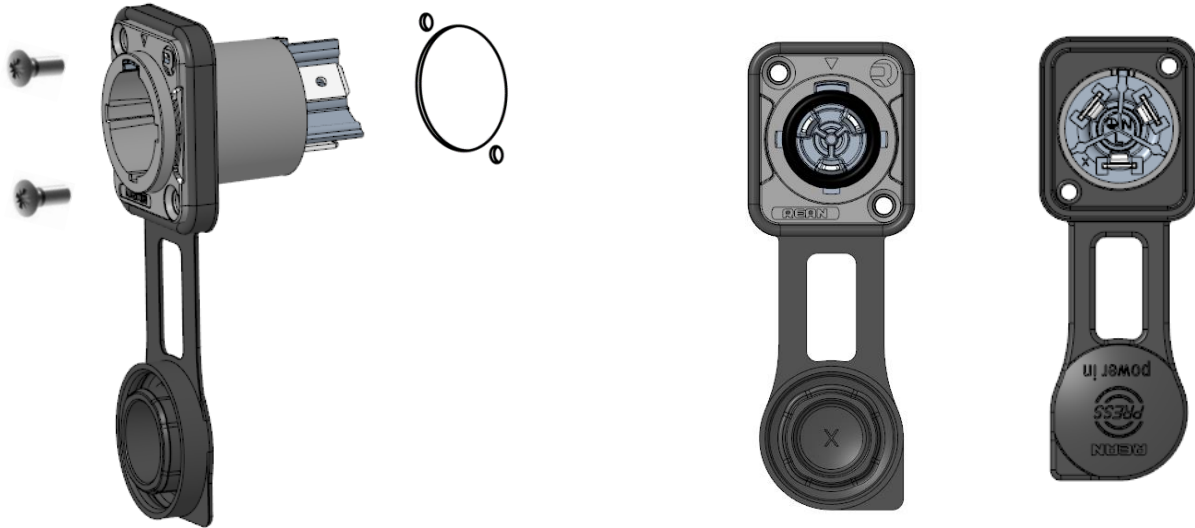


### (B) Panel cut out dimension

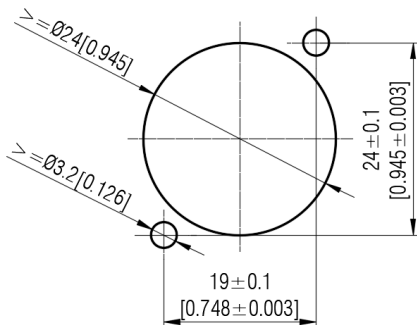

### (C) Recommended screw

Suggestion: Tightening torque  $M_A = 0.4-0.5$  Nm.



IP65 Power Receptacle:  
Find more details on  
[www.rean-connectors.com](http://www.rean-connectors.com)



Neutrik AG                      Li                      T: +423/237 24 24                      F: +423/232 53 93                      Neutrik France                      FR                      T: +33 1/4131 6750                      F: +33 1/4131 0511  
 Neutrik USA Inc.                      USA                      T: +1 704/972 3050                      F: +1 704/438 9202                      Neutrik Tokyo Ltd.                      JP                      T: +81 3/3663 4733                      F: +81 3/3663 4796  
 Neutrik (UK) Ltd.                      UK                      T: +44 1983/811 441                      F: +44 1983/811 439                      Neutrik Hong Kong Ltd. HK                      T: +852/2687 6055                      F: +852/2687 6052  
 Neutrik Vertriebs GmbH DE/NL/AT/DK                      T: +49 8131/280 890                      F: +49 8131/280 830

Draft Nr.: NCN | Update: 2023-10-31 | Data subject to change without prior notice. © 2021 REAN® 2021 REAN® is registered trademark of Neutrik AG. ALL RIGHTS RESERVED.